


15kV | T型 / T-II型接头 T type / T-II type connector

T型/T-II型接头用于电缆分支箱的主网系统或作为环网柜的进、出线电缆接头，即可连接600A高压套管、多联组合插座，也可与600A母线套管、肘型插头组合连接，形成多路电缆分支。产品带验电头。额定电流600A，适用电缆截面25~400mm²，适用Φ40/Φ52/80/5/8"套管。

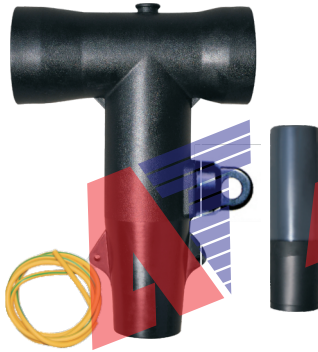

Type: ATT3-15/600/□
(T型接头Connector)

1. Suitable for main net system of cable branch box or the in/out-terminator of ring main unit.
2. It mates with 600A H.V bushing, multi-junction, 600A bus-bar bushing and elbow connector to offer more branch systems.
3. The product matches with test point.
4. The rated current is 600A.
5. Conductor cross section is 25-400mm².
6. Suitable for fully-submersible connection of size Φ 46/Φ 56/91.5/M16 bushing(meet for EN50180 and EN50181).


产品特点

为全绝缘、全密封、全屏蔽产品。引进国际先进的后注射绝缘层工艺，电气性能指标更高，使用更安全可靠。T-II型接头与肘型插头装配后比传统结构缩短了30mm，不但充分满足了环网柜的安装空间要求，而且使电缆分支箱的结构尺寸进一步变小。

2mm厚的均匀外屏蔽层，表面电阻 < 1000Ω/cm，是国际最先进的预制式电缆接头。

Characteristics

1. Fully-insulated, fully-sealed and fully-screen.
2. Adopted the advanced injection technology, with high electric performance, more safe and reliable.
3. The electric performance is more excellent, safe and reliable.
4. The centre distance between T-II connector and elbow connector is 30mm shorter than traditional structure.
5. Meet the mounting space requirement of inflatable type ring main unit and minimized the structure dimension of cable branch box.
6. 2mm thick-homogeneous layer of shielding,
7. Surface resistance < 1000 Ω/cm,
8. The most advanced pre-cable connector.

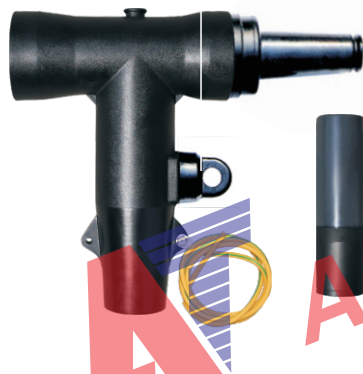

Type: ATT4-15/600/□
(T-II型接头Connector)

- 1、电缆 Cable
- 2、应力锥 Cable adaptor
- 3、接地线 Earthing wire
- 4、T型接头 T connector body
- 5、套管 Bushing
- 6、转换头 Connecting plug
- 7、双头螺栓 Bolt
- 8、圆头端子 Compression lug
- 9、验电点盖 Test point cap
- 10、导电杆 Linking rod
- 11、肘型连接器端子 Elbow connector lug
- 12、肘型插头 Elbow connector body

